



SR-08 Series

ROCKER SWITCH





Specifications:

10(3)A 250VAC T125/55 5E4
 16(4)A 250VAC T125/55
 *10(8)A 250VAC T125/55




10A 250VAC T125
 16A 125VAC T125
 10.1A 250VAC T125
 20A 125VAC T125
 1/2HP 250VAC T125
 1/4HP 125VAC T125

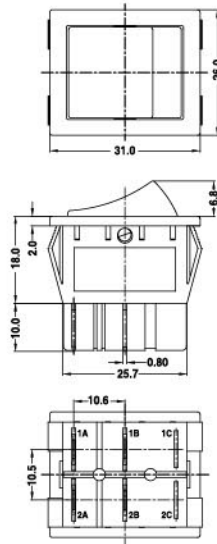

Suggested panel hole size

Panel thickness	X
1.0-1.5	29.0
1.5-2.0	29.4
2.0-3.0	29.8



SR-08

A 2 G T 1 BK BK 2 0 0 0

Function	No. of Poles	Current	Terminal Type	Base Type	Base Color	Button Color	Button Type	Printing	Color of Printing	Lamp Voltage	Internal Use Only
A ON-OFF	1 Single	G 16(4)A 250VAC	T	31.0 26.0	BK Black	BK Black	1 (For N function only)	0 None	0 None	0 None	
B ON-ON	2 Double	10(3)A 250VAC 5E4	T	27.8	WT White	WT White	2 (Except N function)	1	1 White	1 12V	
C ON-OFF-ON		20A 125VAC	T		GE Grey	GE Grey	4 (For N function only)	2	2 Black	2 24V	
D (ON)-OFF		H 16(4)A 250VAC	T1		RE Red	RE Red	1 (For I function only)	3	3 Red	3 110V	
E ON-(OFF)		10(3)A 250VAC 5E4	T1		GR Green	GR Green		4	4 Blue	4 220V	
F ON-(ON)		16A 125VAC	T2		BL Blue	BL Blue		5	5 Yellow		
M ON-OFF-(ON)		1/2HP 250VAC	T2		OR Amber	OR Amber		6			
X (ON)-OFF-(ON)		1/4HP 125VAC	T2		YE Yellow	YE Yellow		7			
N ON-OFF w/lamp			T2					8			
I Indicator			Q					9			
			S					A			
			P					D			
								F			

*For this option, please call factory for details